

roomly  
my-roomly.com

## stepless



**Application:**

Vertical conductor rail profile for installation in panel materials of 16 mm and 19 mm material thickness.


**Materials and finishes:**

steel, powder-coated

**Setting-out details:**

The busbars are available in the wall-mounted version.


During electrification, the total wattage per driver must be taken into account. Additional LED lengths are available.

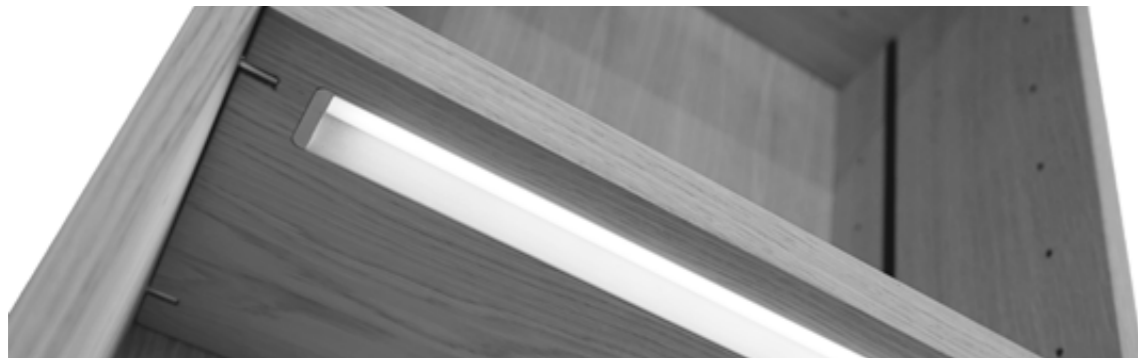

**stepless electrified profile** L 3500 ST 024 100 07 ⚡  
vertical profile, to electrify cabinets, furniture and cut to size ST 024 101 07  
mid-floor gondolas, electrified, without power aluminium, black anodised supply




+ **power feed** ST 024 800 07 ⚡  
24 V, for stepless electrified profile,  
to be screw fixed, cable length 500 mm



+ **LED driver** 18 watt BR 024 810 07 ⚡  
230 V, primary line 1000 mm, 36 watt BR 024 812 07  
secondary line 250 mm 50 watt BR 024 814 07  
75 watt BR 024 816 07  
100 watt BR 024 818 07

Halogen-free available on request



+ **connecting line** 6-way distributor BR 024 831 07 ⚡  
230 V, high voltage, 3000 mm, Euro flat plug  
single round plug BR 024 833 07

+ **UK plug for connecting line** BR 024 840 07

Halogen-free available on request



+ **extension cable**  
high voltage 230 V, L 500 mm BR 024 841 07 ⚡  
with plug-system white colour L 1000 mm BR 024 843 07  
L 2000 mm BR 024 847 07  
low voltage 24 V, L 500 mm BR 024 861 07  
with plug-system green colour L 1000 mm BR 024 863 07  
L 2000 mm BR 024 867 07

Halogen-free available on request



+ **distributor**  
high voltage 230 V, 2-way distributor BR 024 893 07 ⚡  
with plug-system white colour  
low voltage 24 V, 2-way distributor BR 024 883 07  
with plug-system green colour 6-way distributor BR 024 881 07

Halogen-free available on request



**LED recessed lighting unit** 3000 K BR 024 704 05 ⚡  
for timber shelves with a thickness of 19 mm, 4000 K BR 024 705 05  
profile LD8003K, 9,6 watt per metre, 90 Lm/W, aluminium, natural anodised  
24 V, length of 570 mm  
3000 K BR 024 704 16  
4000 K BR 024 705 16  
aluminium, black anodised



+ **power pickup** ST 024 810 07 ⚡  
for stepless electrified profiles, screw fixed,  
with plug-system length 150 mm steel, zinc plated

**Legend to symbols:**

 electrified

**Dimensions:** *(stated in mm)*

L	length	∅	diameter
W	width	C	centre
H	height	→	landscape
D	depth	↑	portrait
t	thickness		

**Load values:** *(stated in kg)*

 -  corresponds to 1 – 60 kg

The following guidelines apply to the load values stated above:

- The load value listed refers to the merchandise elements only.
- Increasing lengths or depths of the fitting elements may lead to a reduced load value.
- The load values listed depend on the construction of the wall. Our calculation is based on installation into timber.
- Fittings may deflect to differing angles for a particular load value.

All rails and fitting elements are covered by patent or copyright.

We reserve the right to amend technical or formal details without prior notice.

**Legal notice**

**roomly GmbH**  
Zeppelinstraße 8-12  
88677 Markdorf  
Germany

T +49 (0) 7544 95 30 700  
F +49 (0) 7544 95 30 719  
hello@roomly.com

Cooperation partner for the LED bright solution:  
Elektra GmbH, [www.elektra.de](http://www.elektra.de)

**roomly GmbH**  
All rights reserved

We do not take any responsibility for any errors or omissions. We reserve the right to amend technical or formal details without prior notice. The reprint and copies of the catalogue or parts of it are subject to the written approval by roomly GmbH.

Our general terms and conditions are available for download in pdf format at [www.my-roomly.com](http://www.my-roomly.com)